




Mönninghoff

SecMatic torque limiter Type 587

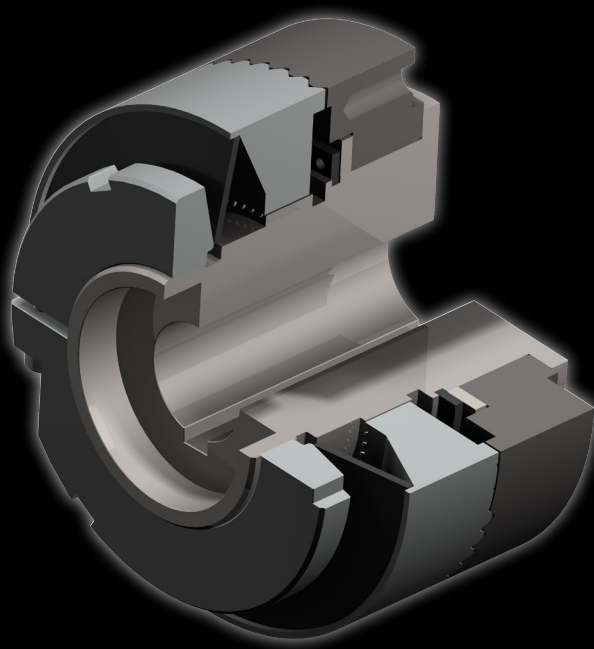

SecMatic torque limiter - Type 587

Characteristics and features


- particularly developed for the increasing safety demands of high-tech systems
- extremely high switching accuracy for static and dynamic loads
- compact design allows easy integration
- special coating ensures consistent torque and a long service life
- slip-free torque transmission
- automatic re-engaging
- maintenance-free
- safe due to sealed design



Mönninghoff power transmission represents an infinite variant diversity that is applied by all areas of modern mechanical engineering.

Our technologies are mostly designed to operate under extreme conditions. We offer high precision products for medical robotics, fail-proof security for aerospace technology or synchronization solutions for the packaging or printing industry.


We thus address customers who have the highest standards for their own machines or systems. To them, we can offer highly complex, application-specific solutions.

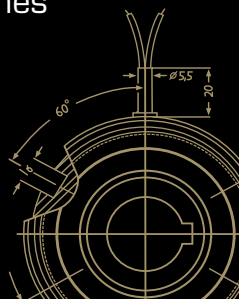

SecMatic torque limiter - Type 587

Match code

Mönninghoff SecMatic torque limiters are indicated by the following match code:

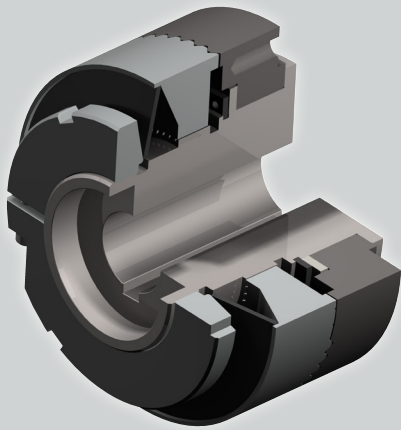

587 . A . 3 . B

A clutch size

B design of armature

Other individual characteristics:

- toothing geometries
- bore size with keyway


According to these characteristics, we design individual solutions concerning transmitted torque, engaging behavior or rotation speed.

Our engineers can assist with finding an application-specific clutch at any time. Together, we can develop individual and innovative solutions for extreme operating conditions.

Ordering Example

Mönninghoff SecMatic torque limiter
Type 587.23.3.5

Nominal torque T_K	200 Nm
Bore d	40 mm H7, keyway acc. to DIN 6885/1
Toothing	TwinArc, right

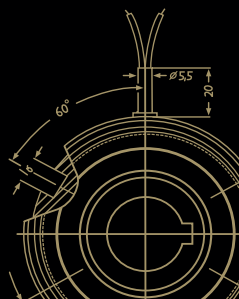

SecMatic torque limiter - Type 587


Clutch size

When dimensioning a Mönninghoff SecMatic torque limiter, several technical preconditions should be considered:

- the overload torque should be at least 20% larger than the average torque
- for the selection of the correct size, not only the peak load but also the dynamic behavior of the drive have to be taken into account, especially for starting or slowing down
- generally, the selection of the correct clutch is based on torque:


$$T_K = (T_a + T_L) \times K \quad [\text{Nm}]$$

T_K	= overload torque
T_a	= starting torque
T_L	= load torque
K	= service factor 1,2 to 3

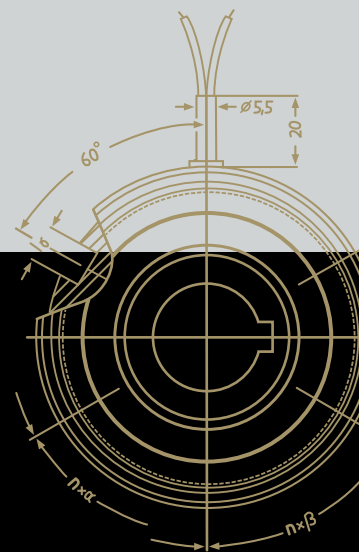


SecMatic torque limiter - Type 587

Clutch size

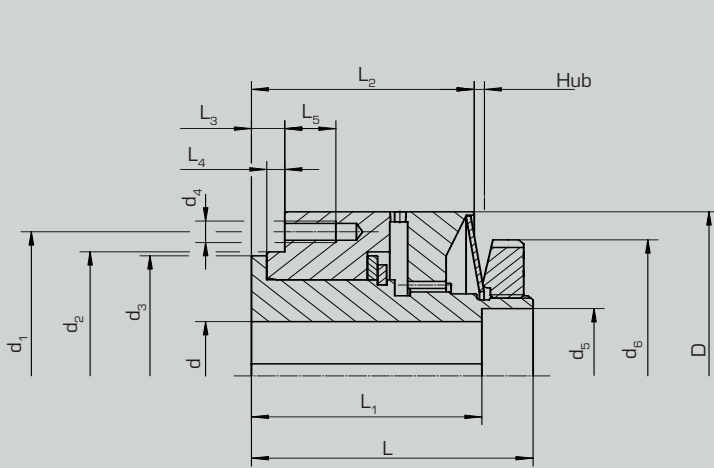


Design 3.1

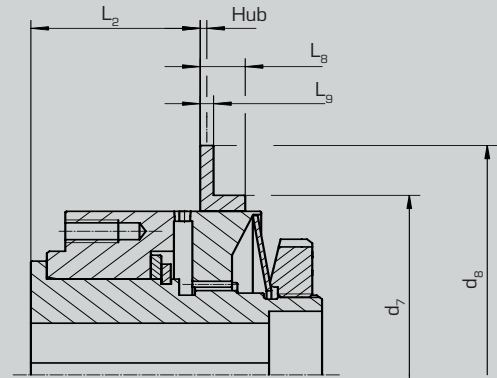

Design 3.5 with switch plate

Technische Daten

Size				12	13	15	21	23	25	31	32
torque		T _{K1}	[Nm]	5 - 30	10 - 60	25 - 120	50 - 225	100 - 450	200 - 900	400 - 1800	800 - 2400
max. speed		n	[min ⁻¹]	250							
inertia	design 3.1	I	[kg m²]	0,36	0,53	1,03	2,43	5,62	12	34,2	62,5
	design 3.5			0,44	0,63	1,37	3,17	7,4	14,85	40,2	82,4
weight	design 3.1	m	[kg]	0,82	0,92	1,44	2,2	3,6	5,8	9,9	13,5
	design 3.5			0,88	0,98	1,54	2,4	4	6,3	10,5	15,2
stroke			[mm]	0,53	0,69	0,8	0,9	1,02	1,27	1,6	1,9
bore H7	keyway acc. to DIN 6885/1	d min.	[mm]	8	10	12	14	18	24	28	45
		d max.	12	15	22	30	40	45	65	80	
	keyway acc. to DIN 6885/3	d max.	15	18	25	35	45	50	70	85	
dimensions		D	[mm]	57	67	82	95	114	134	166	195
	6 x 60°	d ₁		50	57	72	85	101	117	148	172
		d ₂ H7		42	47	62	75	90	100	130	150
		d ₃		40	45	60	72	86	96	128	148
		d ₄		M4	M5	M5	M6	M8	M10	M12	M12
		d ₅		20	23	30	41	51	56	85	104
		d ₆		45	56	68	80	95	110	140	160
		d ₇		64	74	90	107	126	146	178	215
		d ₈		85	90	115	130	165	185	218	250
		L		45	47	55	67	72	87	95	106
		L ₁		38	40	45	55	60	75	80	90
		L ₂		37	37	44	52	57	68	76	88
		L ₃		6	6	6,5	7	8	9	11	13
		L ₄		2,7	2,7	2,7	2,7	3,7	3,7	4,5	8
		L ₅		8	8	10	10	12	15	20	20
		L ₇		28	28	32	38	42	50	55	62
		L ₈		6	6	8,5	10	10	11,5	11,5	16
		L ₉		2	2	2,5	3	3	3	3	6

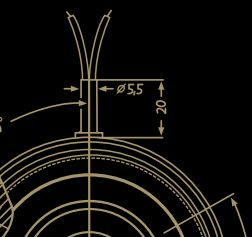

SecMatic torque limiter - Type 587

Belleville spring

An important characteristic of the SecMatic torque limiter is the special belleville spring, which has a negative characteristic in the operating range

- i.e the axial force of the spring decreases on disengagement
- as a result the tooth flank can be straight


Toothing

The SecMatic Type 587 is a reengaging clutch, which slides into the engagement position on every revolution


- fixedpoint shifting is mandatory at one position whilst in serveral positions it is possible to a certain extent
- operating speeds are limited
- matching the shape of tooth to the particular spring element used prevents microscopic movements of the clutch under critical load and fretting corrosion

Special feature: TwinArc-toothform


- makes it possible to transfer different torques in both direction of rotation owing to extremely different flank angles
- only available with single position engagment
- when ordering, the required direction of drive must be specified

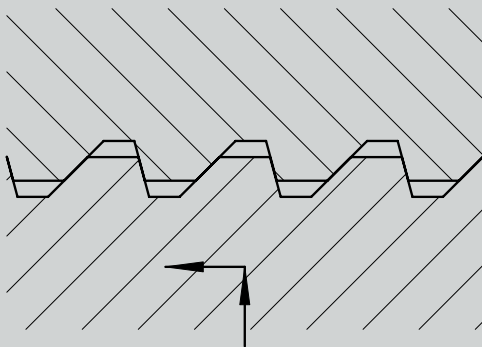

TwinArc clockwise

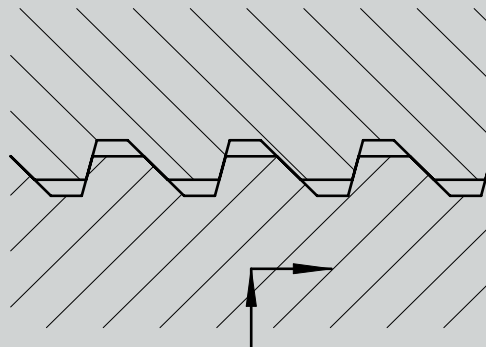


TwinArc counter clockwise

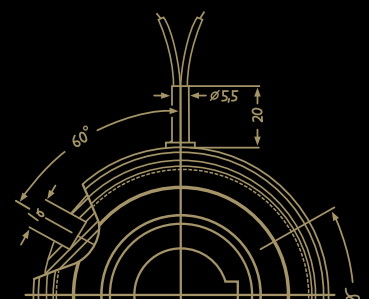

SecMatic torque limiter - Type 587


At a glance

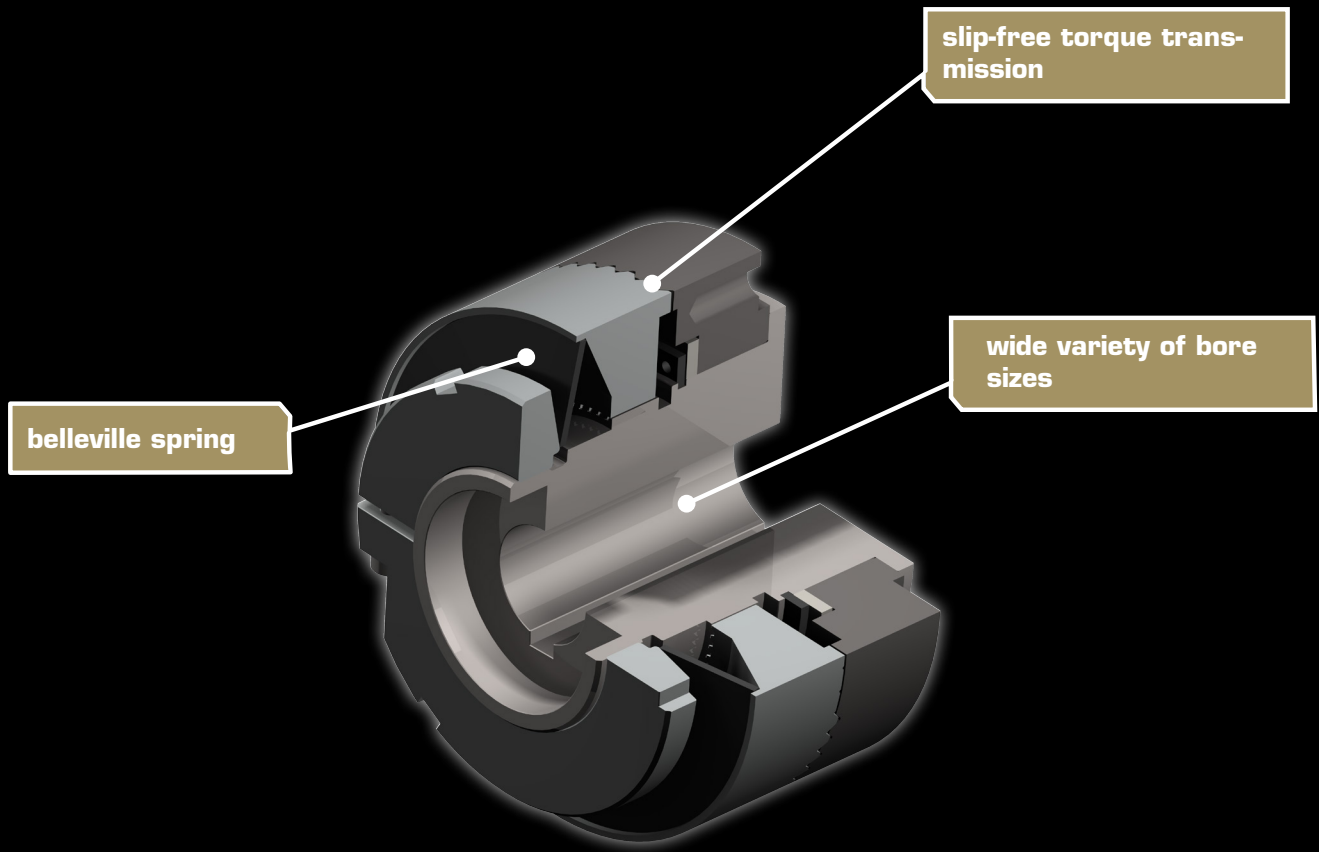


System solutions

You need more?


Mönninghoff clutches can be combined with a variety of many other power transmission elements. Such complex high-tech systems can solve any application-specific tasks and can fulfill any customer-specific wishes.

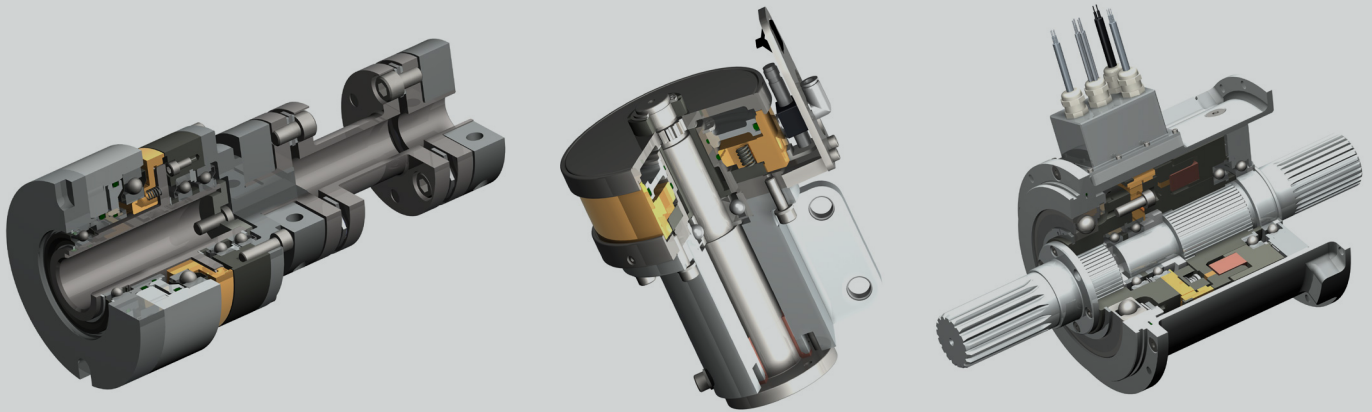

In many cases, a combination of different drive elements is needed to solve the applications particular problems and difficulties. Being not just supplier but technological partner to our customers, our extensive engineering is part of extraordinary and challenging power transmission projects.

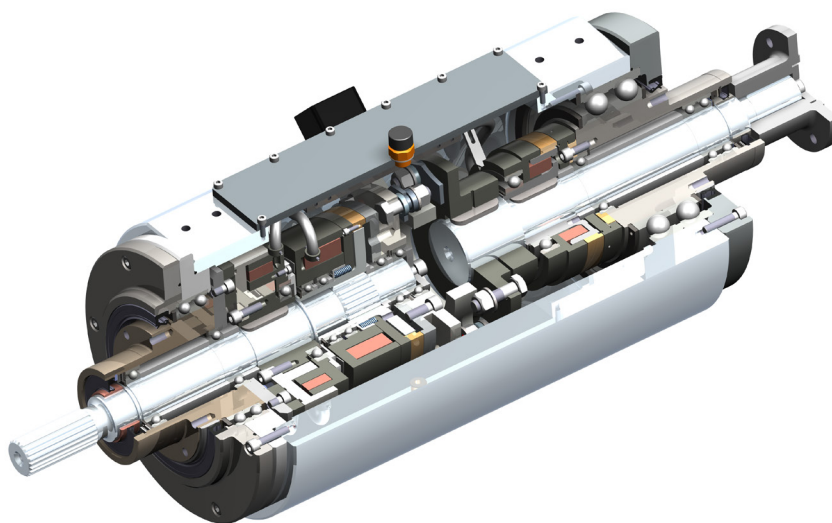

**Our product is the know-how,
with hardware as an added bonus.**

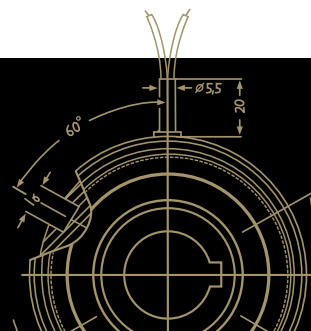

Driven by excellence

Why Mönninghoff

- intensive dialog with our customers' engineers
- decades of experience and competence
- deep understanding for all areas of mechanical engineering
- highly modern and flexible machine park
- enthusiasm for quality
- flexibility, inventiveness and communication skills of our employees
- commitment to Germany and Bochum as industrial location

How to reach us

Sales

sales@moenninghoff.de
+49 2327 3033-250



Helps you find a customer-specific power transmission solution for extraordinary circumstances.

Order Management

confirmation@moenninghoff.de
+49 2327 3033-353



For the competent processing and smooth handling of your orders and delivery dates.

Service

service@moenninghoff.de
+49 2327 3033-333



Feels committed to protect and preserve the high value of your machine and to secure its availability.

